



Starlink antenna bracket power supply manual

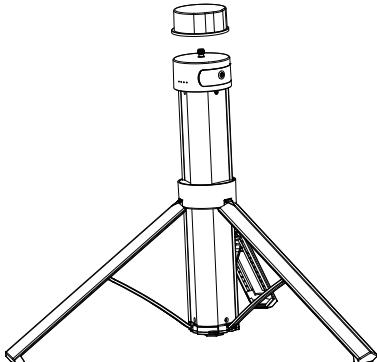


Product List

Thank you for purchasing Our mobile charging stand productfor Starlink mini. After unpacking, please make sure that the following items are complete: a Starlink fixing cover, a power tripod, a USB-C data, and a DC power cable

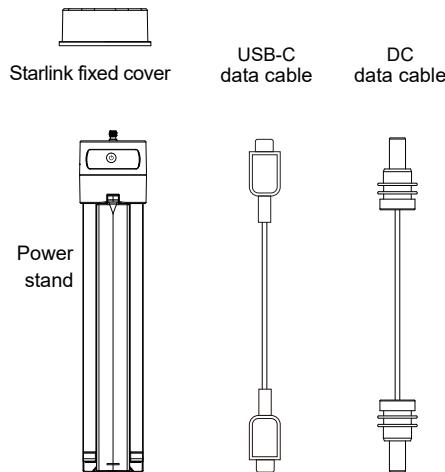


Installation Steps


1. Check the equipment: ensure all parts are intact.
2. Connect the DC power cable
Plug one end of the DC power cord into the DC output of the power stand and connect the other end to the power input of the Starlink antenna.

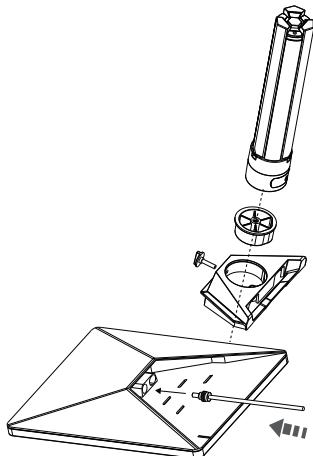


3. Press the tripod switch to open the tripod, and then pull the tripod ring up to unfold.



4. The installation is completed when the unfolded tripod is placed on the ground.



Product information



1. This product is equipped with 4 power indicator holes to display the current battery status.

The details are as follows:

Indicator Status	Battery Level	Description
4 lights on	100%	Fully charged
3 lights on	75%	High charge
2 lights on	50%	Recharge soon
1 light on	25%	Low battery
No lights	0%	Charge immediately

2. Interface description

(1) USB-C interface

Bidirectional input and output:
5V/3A, 9V/3A, 12V/3A, 15V/3A,
20V/3.25, PD 65W Max

(2) DC interface

Output: DC5521, 30V/2A, 60W Max

Rated Energy: 166.5Wh

Rated capacity: 45000mAh(3.7V)
Actual output: ≥45000mAh (5V/1A)